

Inspiring Great Spaces™



VINYL COMPOSITION TILE

STANDARD EXCELON IMPERIAL® SERIES

Standard Excelon Imperial® Series

Vinyl Composition Tile



51912

Geranium




51846

Teahouse Blue




51918

Emerald

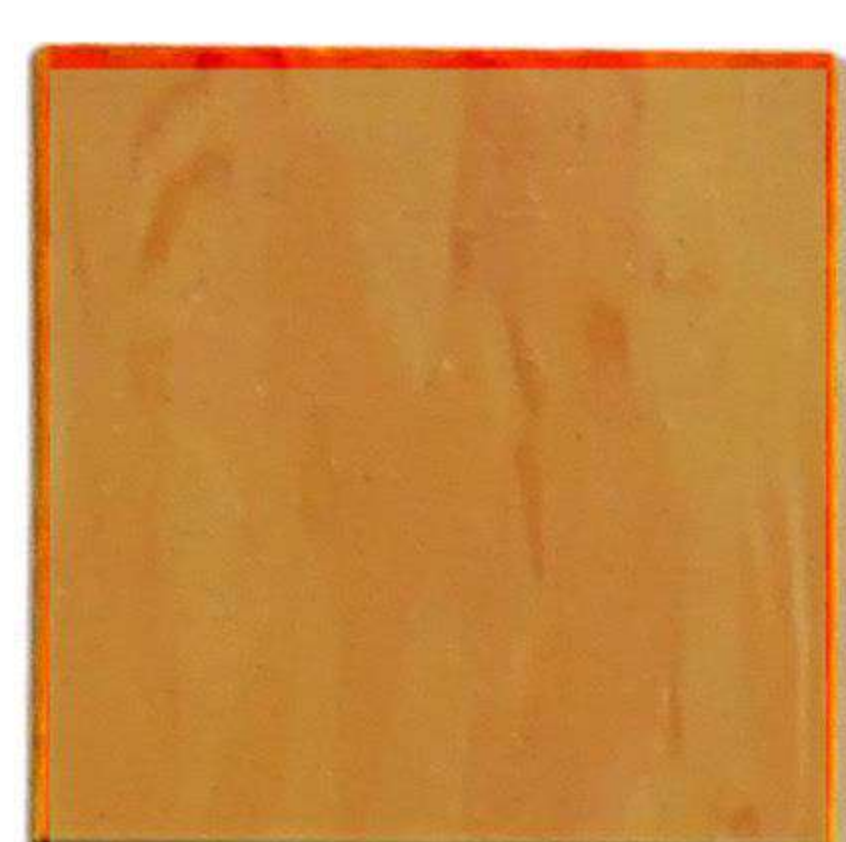

51945

Saffron Gold

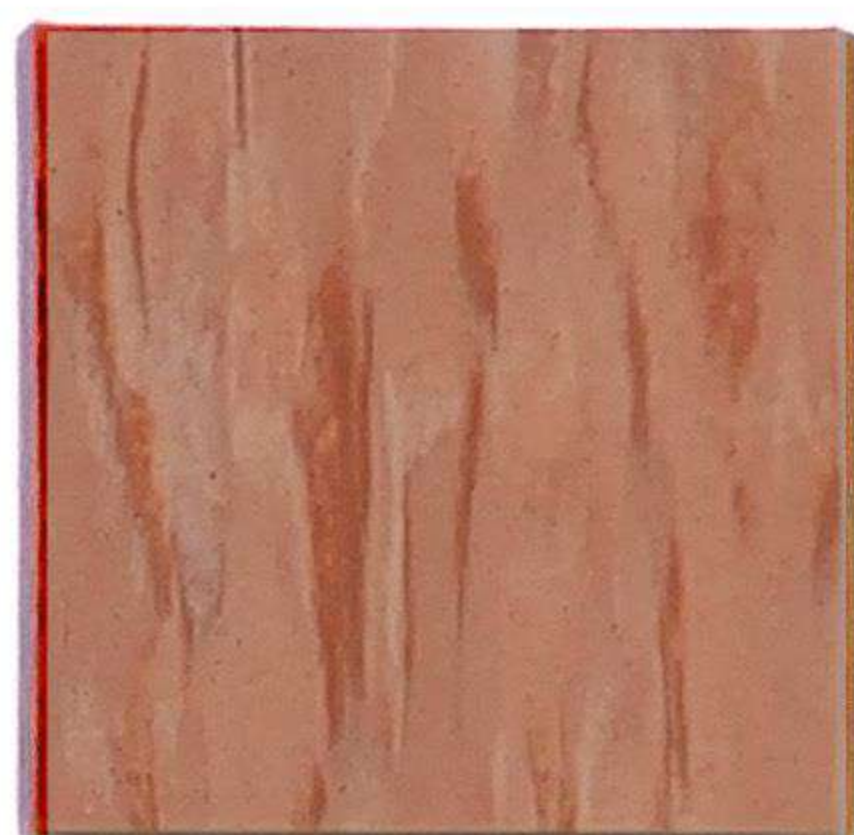

51922

Deep Blush



51919

Aqua Frost




51917

Azure Sky



51935

Lavender Haze

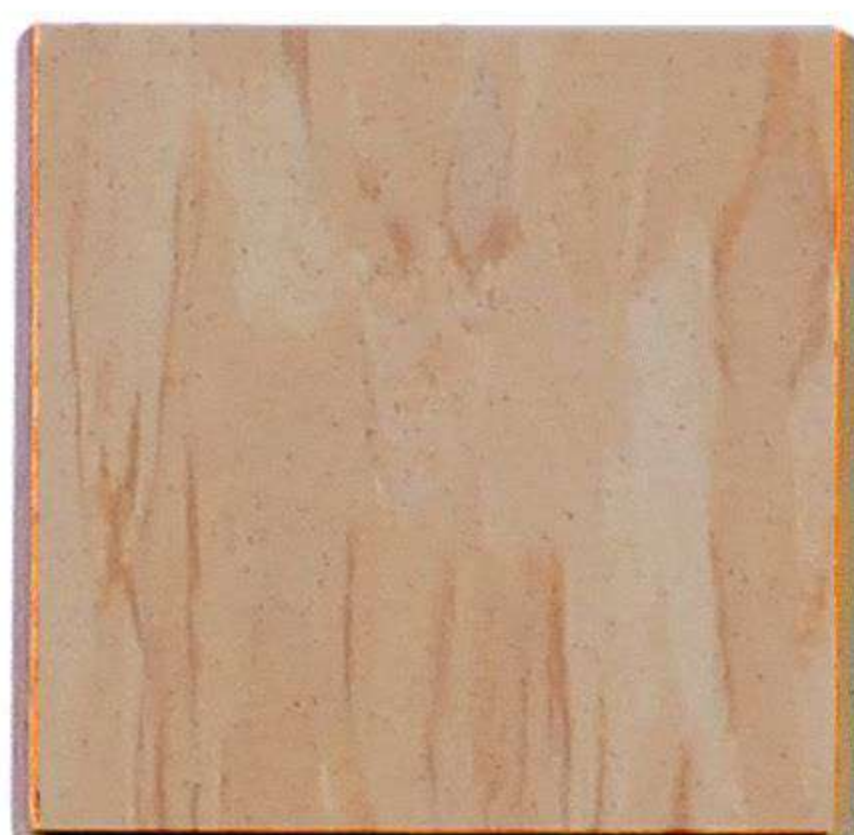

51923

Copper Nuance




51905

Hazelnut



51938

Willow Green

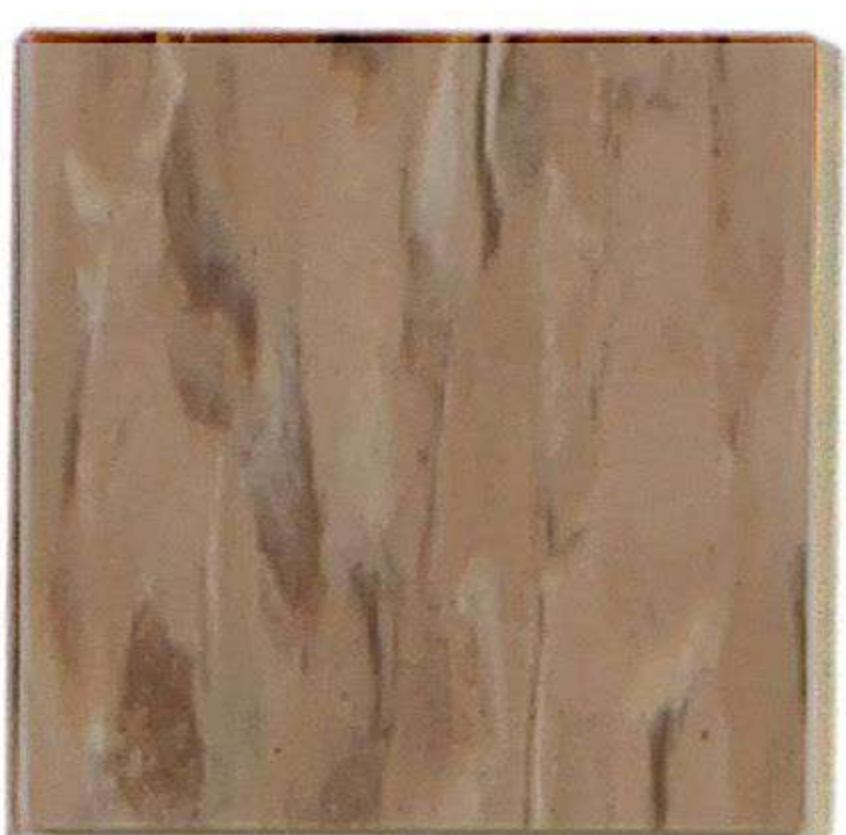

51907

Mocha



51904

Sterling



51903

Blue/Gray



51910

Classic Black



51901

Taupe

Please check with Customer Service Centre for order requirement.

2.0mm / 2.4mm
305 x 305mm (12 x 12in)



51933 Blue Cloud



51940 Golden Dust



51899 Cool White



51911 Classic White



51830 Cottage Tan



51839 Fortress White



51836 Shelter White



51908 Pewter

Technical Data

Characteristics	Standard	Unit	Result
Type of floor covering	ASTM F 1066		Vinyl Composition Tile
Surface finish			Fast start factory finish
Safety criteria			
Fire resistance/ Flammability	ASTM E 648		Flame spread: 0.45 watt/cm2 or more Class I
	ASTM E 662		Smoke evolution: < 450
Performance behaviour			
Tile size		mm	305 x 305
Coverage		sf	45 per carton
Squareness of tiles	ASTM F 2055	inch	> 0.01
Overall thickness	ASTM F 386	mm (inch)	2.0 (0.08), 2.4 (3/32)
Wear layer thickness		mm (inch)	2.0 (0.08), 2.4 (3/32)
Product weight		kg/ ctn	18.67 (2.0 mm) / 22.34 (2.4 mm)
Static load limit	ASTM F 970	psi	125
Indentation	ASTM F 1914	inch	> 0.006 to < 0.015 (1 min)
Dimensional stability	ASTM F 2199	inch	< 0.024 per linear foot
Flexibility	ASTM F 1265		No cracks beyond limit
Static electrical propensity	EN 1815		< 2.0
Chemical resistance	ASTM F 925		No more than slight change in surface dulling, attack or staining



COMMERCIAL - VERY HEAVY



INDUSTRIAL - HEAVY



ANTISTATIC



10 YEARS
WARRANTY



100% Recyclable



Manufactured by
ISO Environmental
and Quality
Certified Facilities

Sample piece in this sample folder is only for color reference, the structure of which may be varied in actual product supplying.

www.armstrongflooring.asia

ARMSTRONG FLOORING OFFICES:

TEL:

FAX:

Hong Kong	(852) 2585 7800	(852) 2598 7181
Singapore	(65) 6604 6836	(65) 6604 6835
Malaysia	(60) 379 323 331	(60) 379 606 331
Indonesia	(62) 21 2965 7866	(62) 21 2965 7867

